Webbing / Round Sling Hooks - Grade 100

Colour-coded sling hook with safety latch - 1, 2, 3 and 5 tonne W.L.L.



1 tonne | 2 tonne | 3 tonne | 5 tonne

1 - 5 tonne — Working load limit (W.L.L.) 4 sizes - see table

Grade 100 — Breaking load 4 x W.L.L. 4 : 1 safety factor

Colour coded — Matches sling W.L.L. colours Violet, green, yellow, red


OVERVIEW

A Grade 100 lifting hook for use with webbing and round slings. The sling is threaded through the eye of the hook, turning it into a hooked sling, and the hook can also be used as a link to join two slings together. Each size is colour coded to match the sling colours, so the right hook is easy to pick.

FEATURES & BENEFITS

- **Sling threads through the eye** - turns a sling into a hooked sling
- **Joins two slings** - can be used as a connecting link
- **Colour coded** to match sling W.L.L. colours
- **Safety latch** to help retain the load
- **Grade 100** - breaking load four times the W.L.L.
- **Marked** with W.L.L. and CE

DIMENSIONS

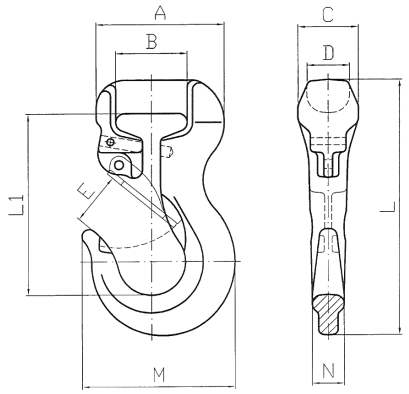

B - sling seat width · E - throat opening · L - overall length

MODELS & DIMENSIONS

Product code	Colour	W.L.L. (tonne)	Breaking load (tonne)	A	B	C	D	E	M	N	L1	L	Weight (kg)
BH1	Violet	1	4	57	35	28	18	24	73	17	84	117	0.45
BH2	Green	2	8	72	40	34	24	28	86	18	102	143	0.9
BH3	Yellow	3	12	87	47	38	29	30	108	24	120	168.5	1.48
BH5	Red	5	20	131	73	45	35	43	131	28	155	224	3.4

All dimensions in mm (nominal - manufacturing tolerances apply). Weights are per hook.

Important: Never exceed the W.L.L. marked on the hook, and use a hook rated at least equal to the sling. Seat the load in the bowl of the hook - never on the tip or the latch - and make sure the latch closes fully. Do not lift loads over people. Inspect before each use and withdraw from service if damaged or deformed.