




Green Pin® Rotating Hoist Ring

metric coarse thread

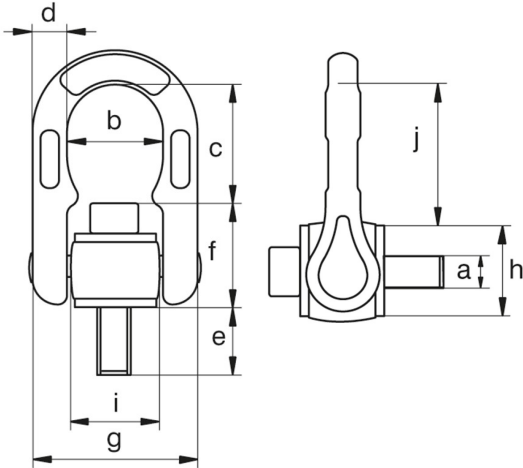

Material Alloy steel, Grade 8, quenched and tempered

Safety Factor MBL equals 5 x SWL

Finish Painted white

Temp Range 40°C up to +200°C

Certification As standard; EC Declaration of Conformity
Upon request; 3.1, 2.2, 2.1, MPIb, CE

WLL indicated hereunder are given in the worst conditions of use, i.e. 90°

WLL	Diameter	Width	Length	Diameter	Length	Thickness	Width	Diameter	Diameter	Length	Product	Weight
	Thread	Inside	Inside			Base	Outside	Base	Base	Inside	Code	Each
tons	a	b	c	d	e	f	g	h	i	j		kg
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		
0.4	M8 x 1.25	35	41	13	18	35	68	34	38	43	29801	0.43
0.7	M10 x 1.5	35	39	13	18	37	68	34	38	43	29802	0.44
1	M12 x 1.75	35	36	13	22	39	68	34	38	43	29803	0.46
1.3	M14 x 2.0	35	35	13	22	42	68	34	38	43	29804	0.47
1.6	M16 x 2.0	35	42	13	28	43	68	34	38	52	29805	0.52
2	M18 x 2.5	35	40	13	28	45	68	34	38	52	29806	0.54
2.5	M20 x 2.5	35	38	13	32	47	68	34	38	52	29807	0.59
3	M22 x 2.5	53	57	20	33	69	105	49	56	71	29808	1.88
4	M24 x 3.0	53	55	20	39	71	105	49	56	71	29809	1.93
5	M27 x 3.0	53	61	20	45	65	105	49	56	71	29810	1.96
6.3	M30 x 3.5	53	61	20	45	65	105	49	56	71	29811	2.03
7	M33 x 3.5	71	87	30	54	83	146	68	77	98	29812	5.28
10	M36 x 4.0	71	87	30	54	84	146	68	77	98	29813	5.35
10	M39 x 4.0	71	87	30	63	84	146	68	77	98	29814	5.45
12.5	M42 x 4.5	71	87	30	63	84	146	68	77	98	29815	5.56