


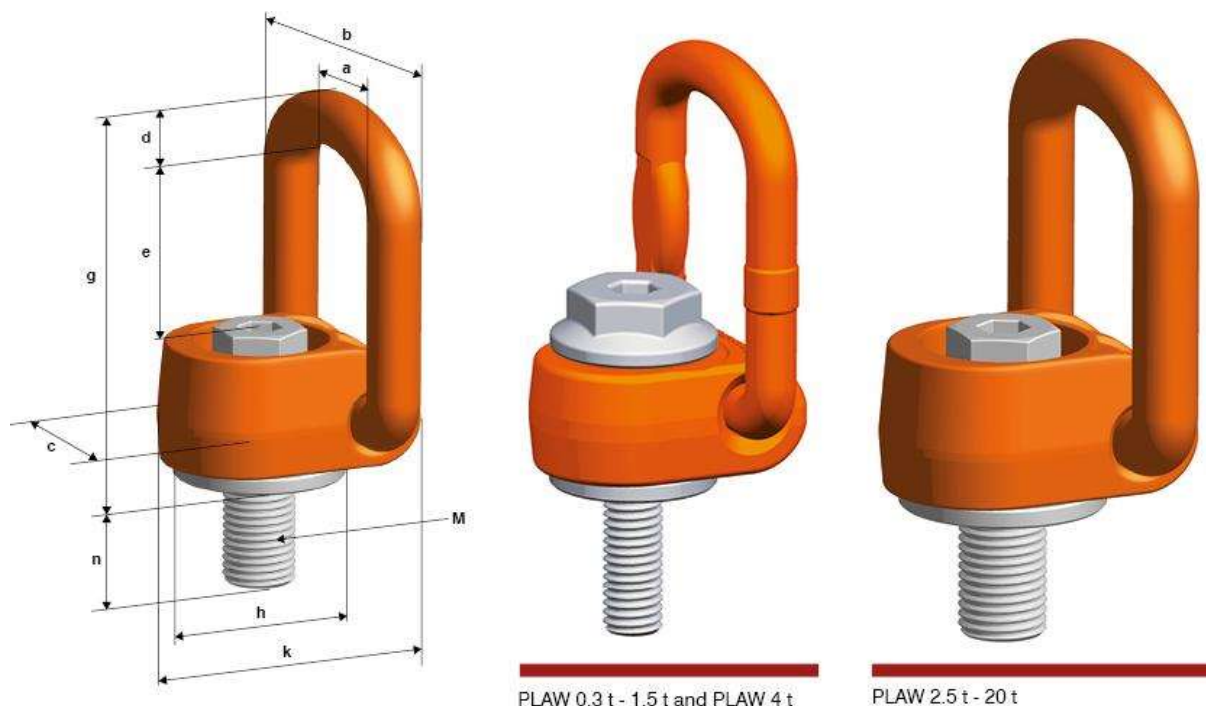

Code	Thread [mm]	Load capacity [kg]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	g [mm]	h [mm]	k [mm]	n [mm]	n max [mm]	mm	mm	Weight [kg/pc.]
PLAW 0,3 t	M8	300	45	67	40	11	41	95	36	55	20	150	10	24	0.57
PLAW 0,63 t	M10	630	45	67	40	11	41	95	36	55	20	150	10	24	0.58
PLAW 1 t	M12	1,000	45	67	40	11	41	95	36	55	33	170	10	24	0.60
PLAW 1,5 t	M16	1,500	45	67	40	11	41	95	36	55	33	260	10	24	0.62
PLAW 2,5 t	M20	2,500	54	81	50	13	55	112	50	67	33	335	8	24	1.10
PLAW 4 t (/13)	M24	4,000	54	87	50	17	67	142	45	70	36	361	14	36	1.60
PLAW 6 t	M30	6,000	75	115	67	20	68	143	67	100	49	364	14	36	3.10
PLAW 7 t ¹⁾	M36	7,000	75	115	67	20	65	143	60	100	55	374	27	-	3.30
PLAW 8 t	M36	8,000	93	147	85	27	87	188	85	120	55	365	19	41	6.10
PLAW 10 t	M42	10,000	93	147	85	27	87	188	85	120	65	365	19	41	6.40
PLAW 15 t	M42	15,000	115	181	105	33	108	246	106	150	63	340	19	55	12.00
PLAW 20 t	M48	20,000	115	181	105	33	108	246	106	150	73	340	19	55	12.30

Code	Thread [inch]	Load capacity [lbs]	a [inch]	b [inch]	c [inch]	d [inch]	e [inch]	g [inch]	h [inch]	k [inch]	n [inch]	n max [inch]	[inch]	[inch]	Weight [lbs/pcs.]
PLAW U3/8	3/8"-16	1,400	1.77	2.64	1.57	0.43	1.71	3.56	1.42	2.17	1.30	-	5/16"	-	1.28
PLAW U1/2	1/2"-13	2,200	1.77	2.64	1.57	0.43	1.61	3.72	1.42	2.17	1.30	-	3/8"	15/16"	1.32
PLAW U5/8	5/8"-11	3,300	1.77	2.64	1.57	0.43	1.71	3.56	1.42	2.17	1.30	-	1/2"	-	1.41
PLAW U3/4	3/4"-10	4,400	2.13	3.19	1.97	0.51	2.24	4.21	1.97	2.64	1.30	-	9/16"	-	2.40
PLAW U1	1"-8	8,800	2.95	4.53	2.64	0.79	2.68	5.63	2.64	3.94	1.42	-	3/4"	-	6.60
PLAW U1 1/4	1 1/4"-7	13,200	2.95	4.53	2.64	0.79	2.68	5.63	2.64	3.94	1.93	-	7/8"	-	6.80
PLAW U1 1/2	1 1/2"-6	17,600	3.66	5.79	3.35	1.06	3.43	7.40	3.35	4.72	2.09	-	1"	-	13.40
PLAW U1 3/4	1 3/4"-5	22,000	3.66	5.79	3.35	1.06	3.43	7.40	3.35	4.72	2.44	-	1 1/4"	-	14.10

¹⁾ Available upon request only!

Safety factor 4

Important: Subject to technical changes!