



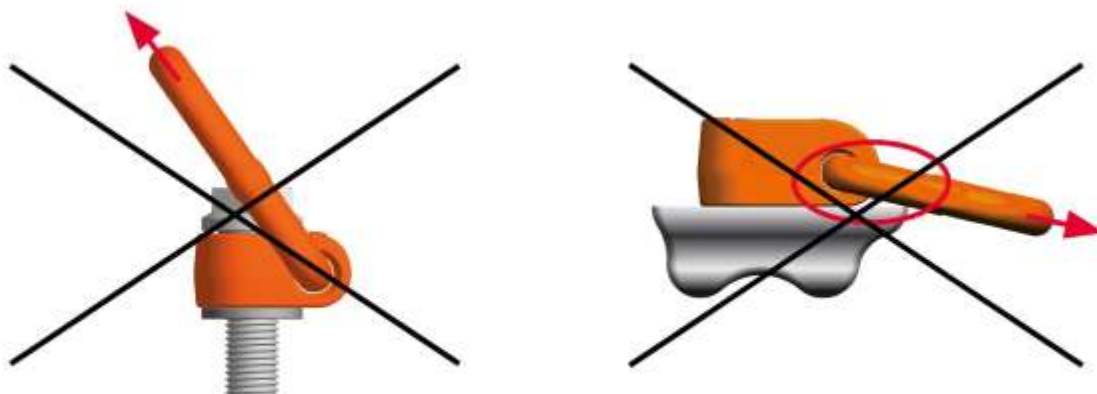

Non-permitted directions of pull

Method of lifting
Number of legs
Angle of inclination

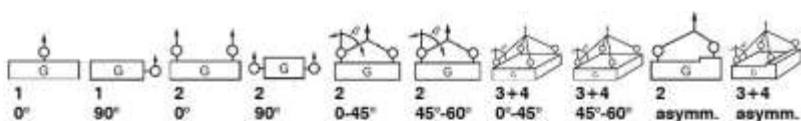

Code	Thread [mm]	Fastening torque [Nm]	Load capacity [kg]									
PLAW 0,3 t	M8	35	300	300	600	600	400	300	600	400	300	300
PLAW 0,63 t	M10	70	630	630	1,260	1,260	850	630	1,300	900	630	630
PLAW 1 t	M12	120	1,000	1,000	2,000	2,000	1,400	1,000	2,100	1,500	1,000	1,000
PLAW 1,5 t	M16	150	1,500	1,500	3,000	3,000	2,100	1,500	3,100	2,200	1,500	1,500
PLAW 2,5 t	M20	170	2,500	2,500	5,000	5,000	3,500	2,500	5,300	3,700	2,500	2,500
PLAW 4 t (/13)	M24	400	4,000	4,000	8,000	8,000	5,600	4,000	8,400	6,000	4,000	4,000
PLAW 6 t	M30	500	6,000	6,000	12,000	12,000	8,500	6,000	12,700	9,000	6,000	6,000
PLAW 7 t ¹⁾	M36	700	7,000	7,000	14,000	14,000	9,800	7,000	14,800	10,500	7,000	7,000
PLAW 8 t	M36	800	8,000	8,000	16,000	16,000	11,300	8,000	16,900	12,000	8,000	8,000
PLAW 10 t	M42	1,500	10,000	10,000	20,000	20,000	14,000	10,000	21,000	15,000	10,000	10,000
PLAW 15 t	M42	1,500	15,000	15,000	30,000	30,000	21,000	15,000	31,500	22,500	15,000	15,000
PLAW 20 t	M48	2,000	20,000	20,000	40,000	40,000	28,000	20,000	42,000	30,000	20,000	20,000

Code	Thread [inch]	Fastening torque [ft-lbs]	Load capacity [lbs]									
PLAW U3/8	3/8"-16	52	1,400	1,400	2,800	2,800	1,980	1,400	2,970	2,100	1,400	1,400
PLAW U1/2	1/2"-13	89	2,200	2,200	4,400	4,400	3,000	2,200	4,600	3,300	2,200	2,200
PLAW U5/8	5/8"-11	110	3,300	3,300	6,600	6,600	4,600	3,300	6,800	4,800	3,300	3,300
PLAW U3/4	3/4"-10	125	4,400	4,400	8,800	8,800	6,000	4,400	9,200	6,500	4,400	4,400
PLAW U1	1"-8	295	8,800	8,800	17,600	17,600	12,300	8,800	18,400	13,200	8,800	8,800
PLAW U1 1/4	1 1/4"-7	369	13,200	13,200	26,400	26,400	18,700	13,200	27,800	19,800	13,200	13,200
PLAW U1 1/2	1 1/2"-6	590	17,600	17,600	35,200	35,200	24,800	17,600	37,300	26,400	17,600	17,600
PLAW U1 3/4	1 3/4"-5	740	22,000	22,000	44,000	44,000	30,000	22,000	45,000	33,000	22,000	22,000

¹⁾ Available upon request only!

Safety factor 4

Important: Subject to technical changes!