


# G80 Ball Bearing Swivel Self Locking Hook

- ◆ Forged super alloy steel Quenched and Tempered.
- ◆ Suitable for EN818-2 G80 chain.
- ◆ Individually proof test at 2.5 times Working Load Limit.
- ◆ Fatigue tested at 1.5 times Working Load Limit for 20000 cycles
- ◆ Breakage test
- ◆ 100% magnaflux crack detection
- ◆ Surface finish: Powder plastified
- ◆ Colour code: Red
- ◆ Positive lock latch is Self-Locking when hook is loaded

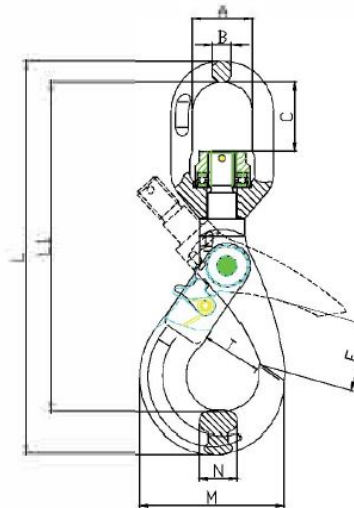

ITEM NO.	WEIGHT (KG)	WLL (T)	B.L (T)	A	B	C	L1	L	T	E	M2	N	Ø±1.5
BB-G80-6-SSLH	0.71	1.12	4.48	32.5±1	11.5±0.5	33.8±2	160±3	194±3	28±1	32±2	73±2	15±0.5	34
BB-G80-7-SSLH	1.1	2	8	36±1	13±0.5	40±2	202±3	240±3	35±1	40±3	91±2	20±0.5	44
BB-G80-10-SSLH	2.1	3.15	12.6	42±1	15.5±0.5	48±2	237±3	283±3	45±2	48±3	108±2	26±1	58
BB-G80-13-SSLH	4	5.3	21.2	50±2	17±1	58±3	282±4	343±4	52.5±2	57±3	142±3	33±1	70
BB-G80-16-SSLH	7.3	8	32	61±2	21.5±1	60±3	341.5±4	419±4	63±2	65±4	168.6±3	38±2	86
BB-G80-20-SSLH	11.6	12.5	50	76±3	26.5±1	75.5±3	399.5	483±5	82±3	82±4	185±4	50±2	97
BB-G80-22-SSLH	16	15	60	97±3	33±2	97±4	466±5	564±5	76±3	80±5	202±4	52±2	98
BB-G80-26-SSLH	21.5	21.2	84.8	123±4	42±2	115±4	544±6	661±6	96±4	109±5	239±5	60±3	110

Ultimate load is 4 times the Working Load Limit