



G80 Round Sling Coupling Model No. 8-053

Main Features

- Design factor 4:1 proof tested and certified

Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.


Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.



Technical Data

Product Code	Capacity (tonne)	For Grade 80 Chain	Dimensions (mm)				Net Weight (kg)
			A	B	K	W	
8-053-07	2.0	7, 8	18	24	33	40	0.2
8-053-10	3.15	10	25	29	42	47	0.4
8-053-13	5.3	13	30	35	51	53	0.7
8-053-16	8.0	16	36	44	63	67	1.3
8-053-20	12.5	18, 20	42	52	71	80	2.1
8-053-22	15.0	22	49	72	112	125	5.7

Other sizes available - please ask for details.

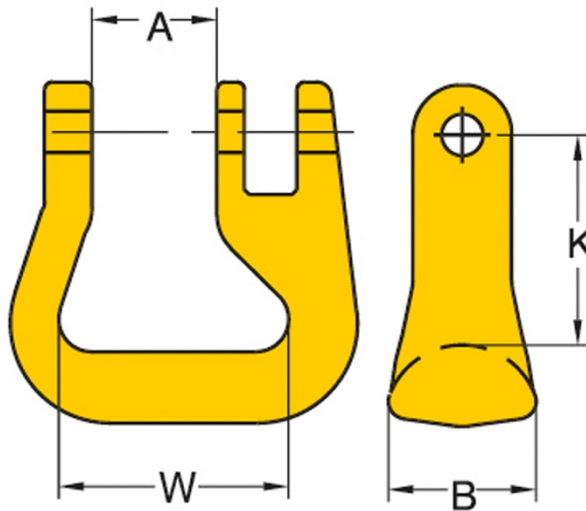

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.